



L O U V E R S
B E Y O N D
O R D I N A R Y



9.5 ft.



Fire
Retardant



Direct-to-wall
Application

Height : 9.5FT.
Width : 120MM



USE ALUMINIUM CLIP FOR DIRECT WALL APPLICATION


Experience the new-age installation system with our Aluminium Clip for Louvers, engineered for direct wall mounting. Crafted from premium-grade Aluminium, this clip provides superior grip, easy installation, and long-lasting durability — ensuring every panel stays perfectly aligned and securely fastened.






TR 6520

POMELLE

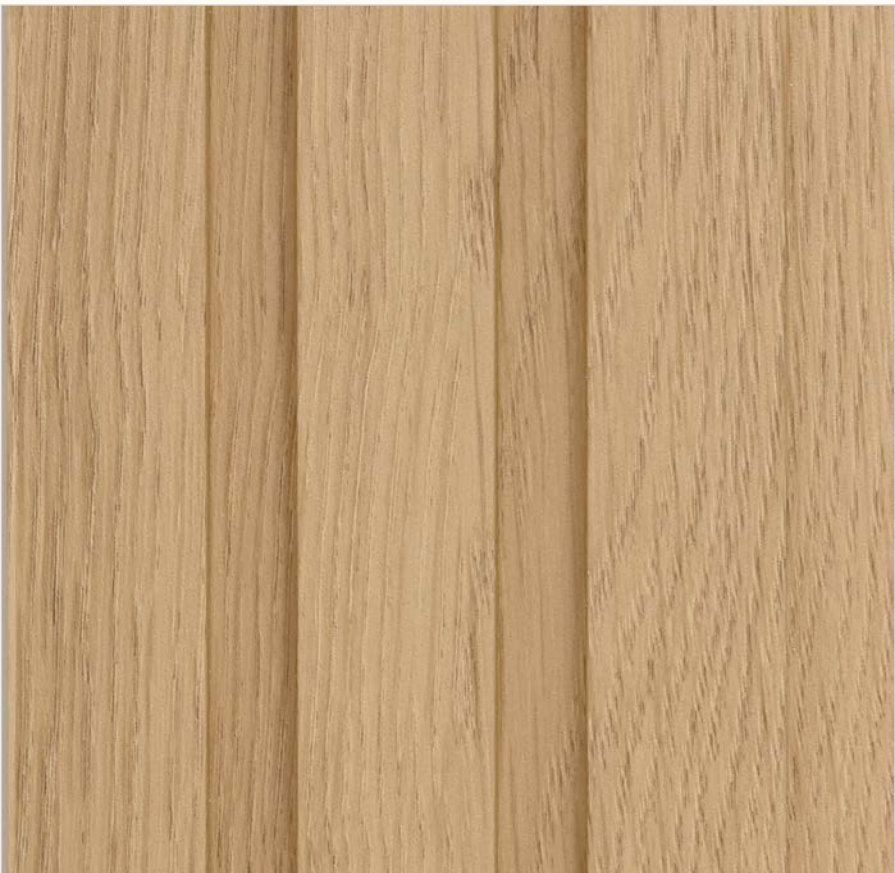

TR 6515

WHITE OAK

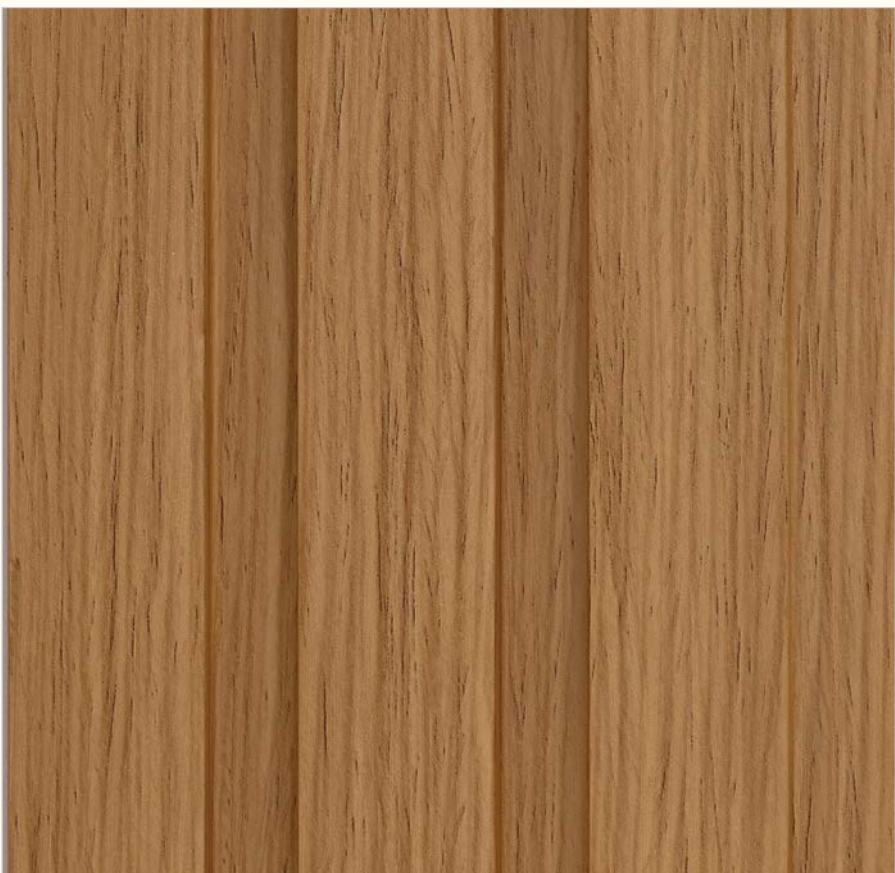


TR 6503

NORDIC OAK




TR 6502

WHITE ASH

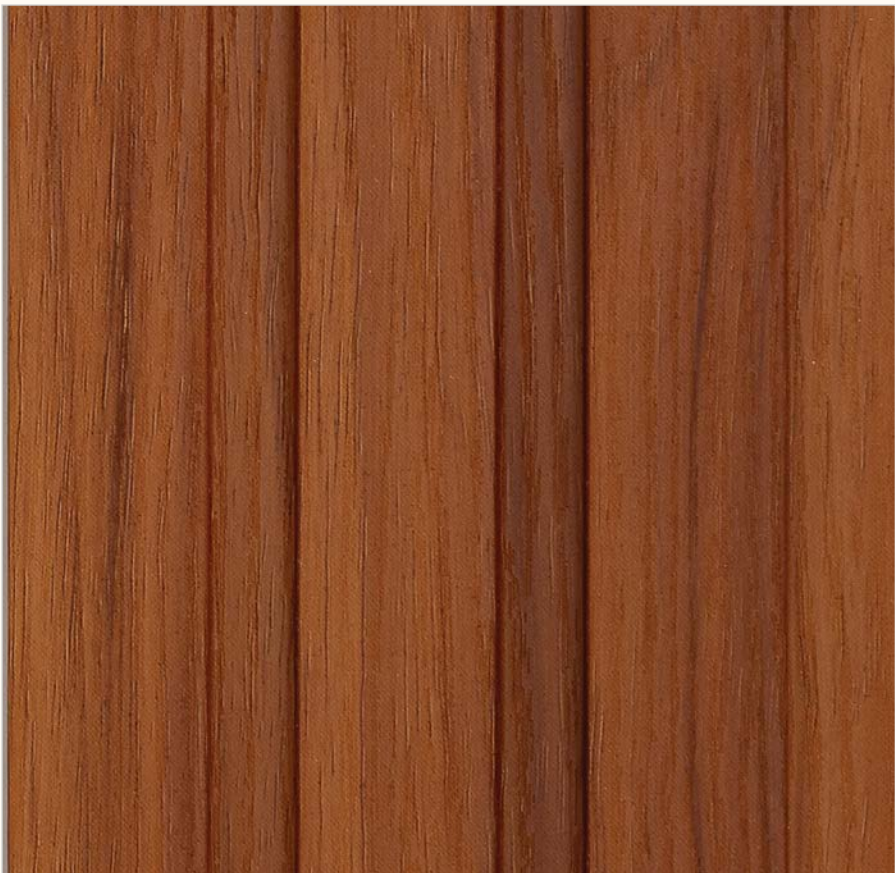

TR 6505

BRAZILIAN CHERRY

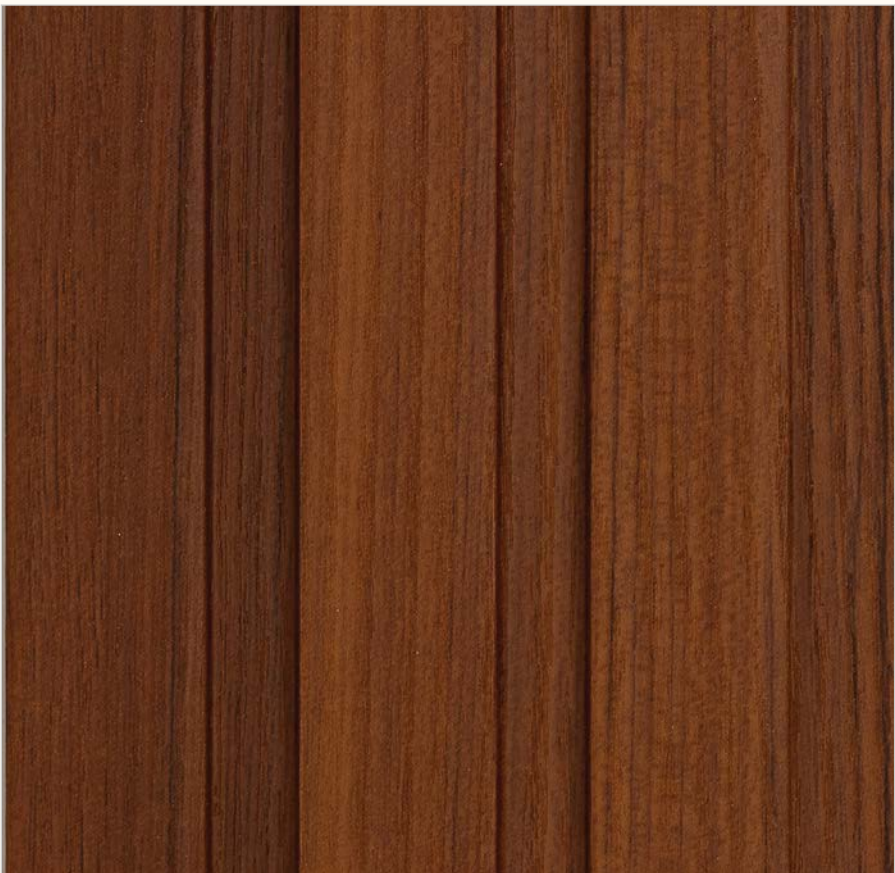

TR 6506

ROSEWOOD




TR 6509

EUCALYPTUS



TR 6519

AMERICAN WALNUT

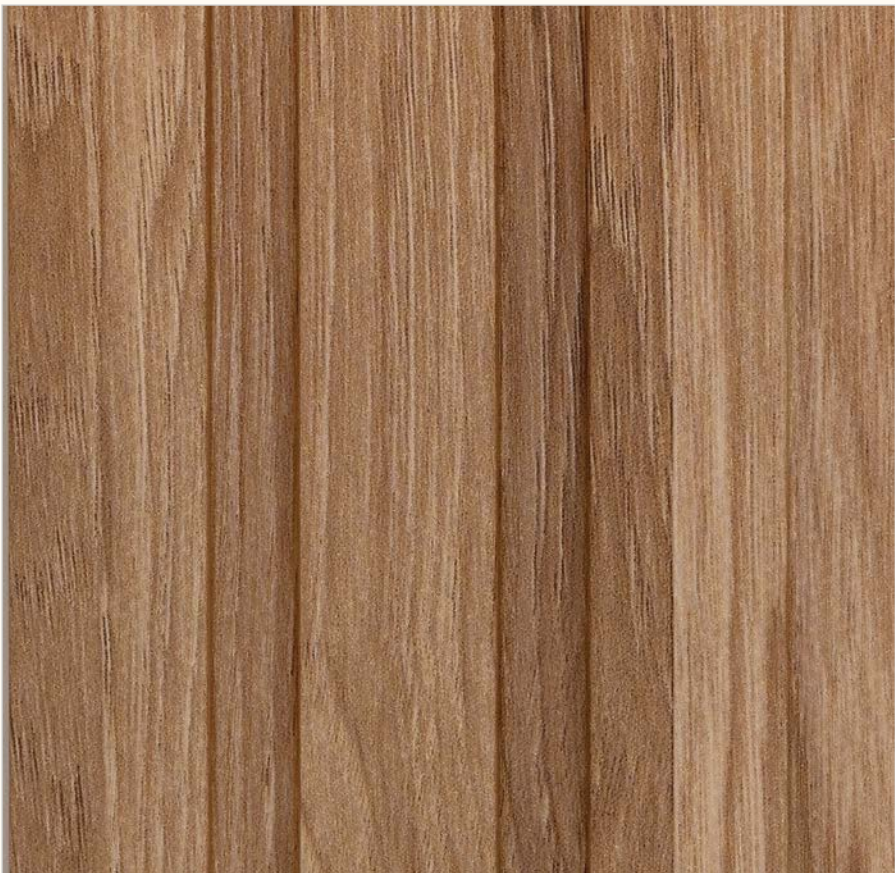


TR 6501

SUCUPIRA




TR 6518

GOLDEN TEAK

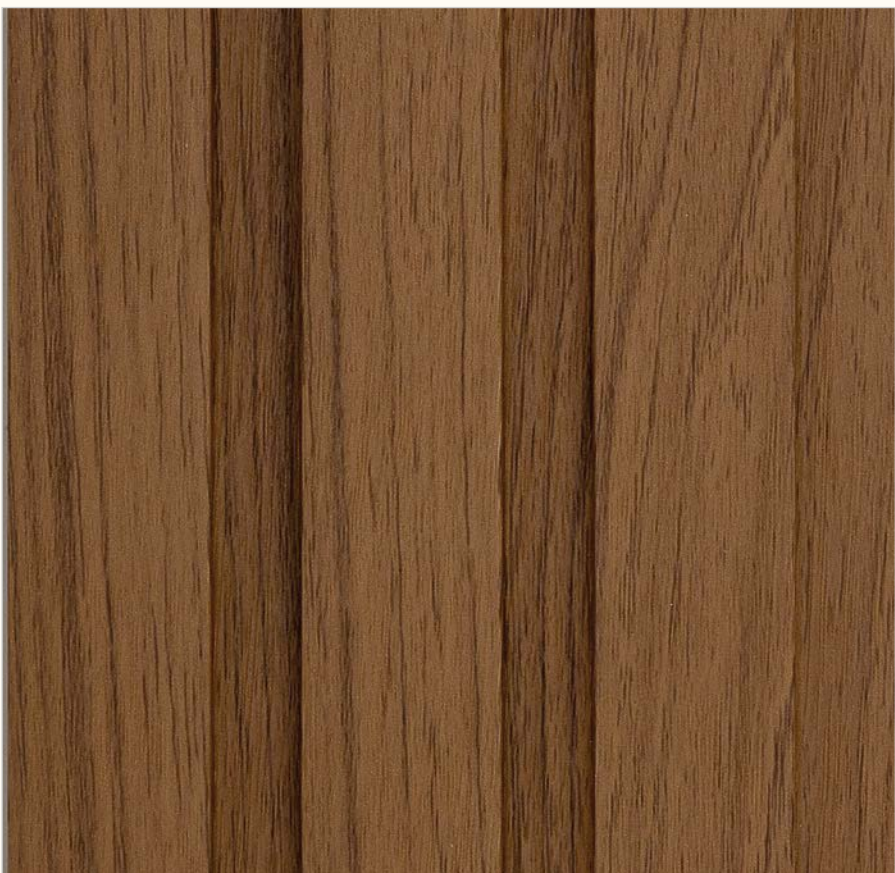


TR 6516

CHESTNUT

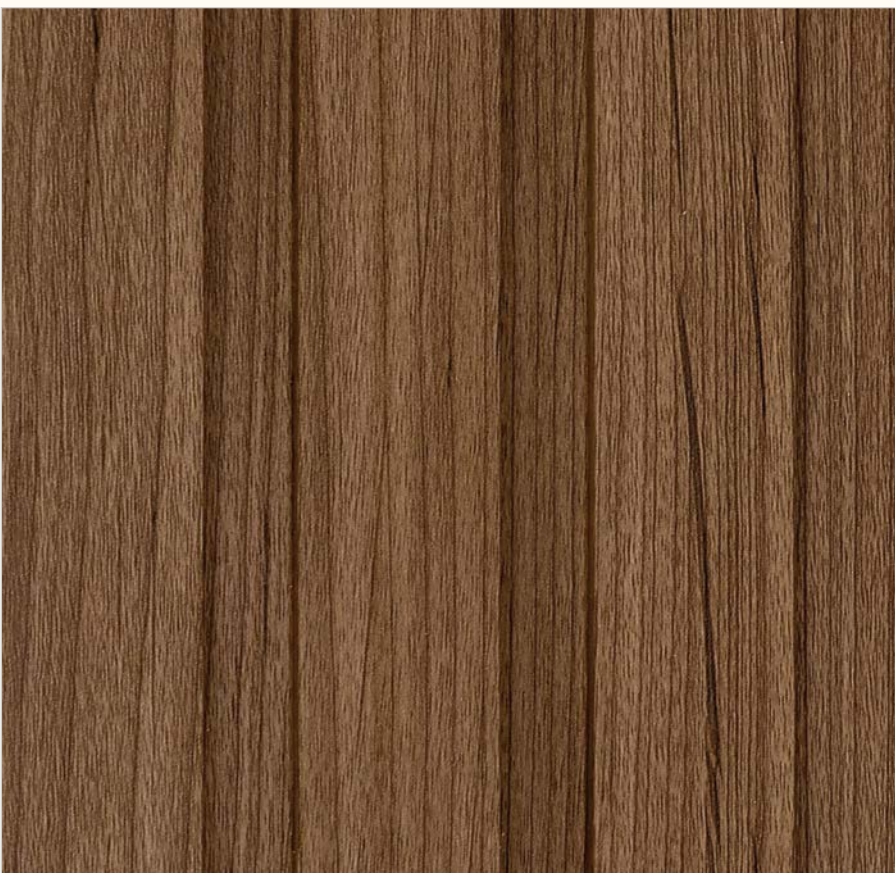


TR 6504

BURMA TEAK

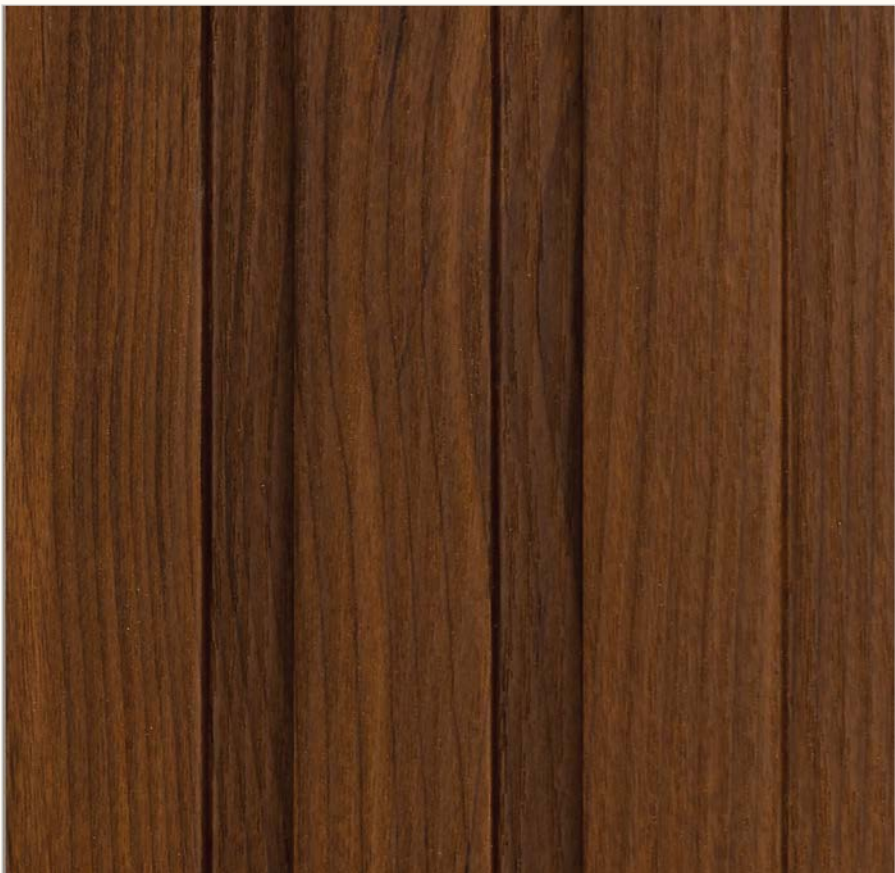

TR 6507

NATURAL TEAK

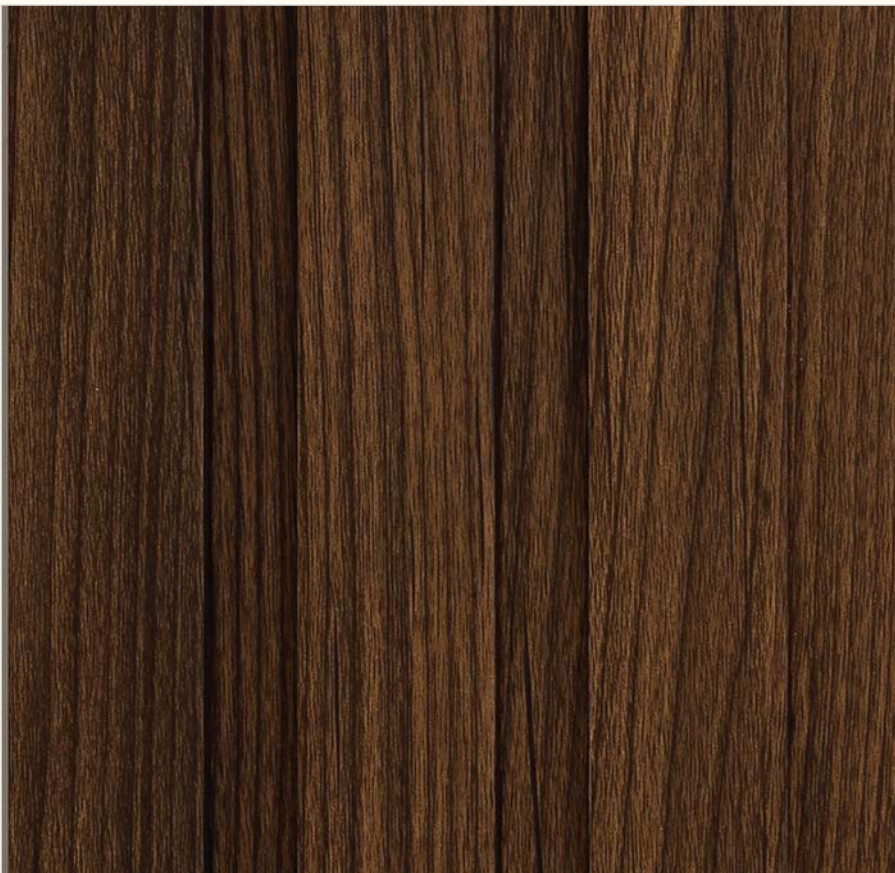

TR 6508

BRAZILIAN TEAK



TR 6517

AFRICAN TEAK



TR 6510

SMOKE OAK



TR 6570

POMELLE



TR 6565

WHITE OAK



TR 6553

NORDIC OAK



TR 6552

WHITE ASH



TR 6555

BRAZILIAN CHERRY



TR 6556

ROSEWOOD



TR 6559

EUCALYPTUS



TR 6569

AMERICAN WALNUT



TR 6551

SUCUPIRA



TR 6568

GOLDEN TEAK



TR 6566

CHESTNUT



TR 6554

BURMA TEAK



TR 6557

NATURAL TEAK



TR 6558

BRAZILIAN TEAK



TR 6567

AFRICAN TEAK



TR 6560

SMOKE OAK



TR 6511

NATURAL CROTCH



TR 6561

NATURAL CROTCH




TR 6512

MAPLE CROWN



TR 6562

MAPLE CROWN

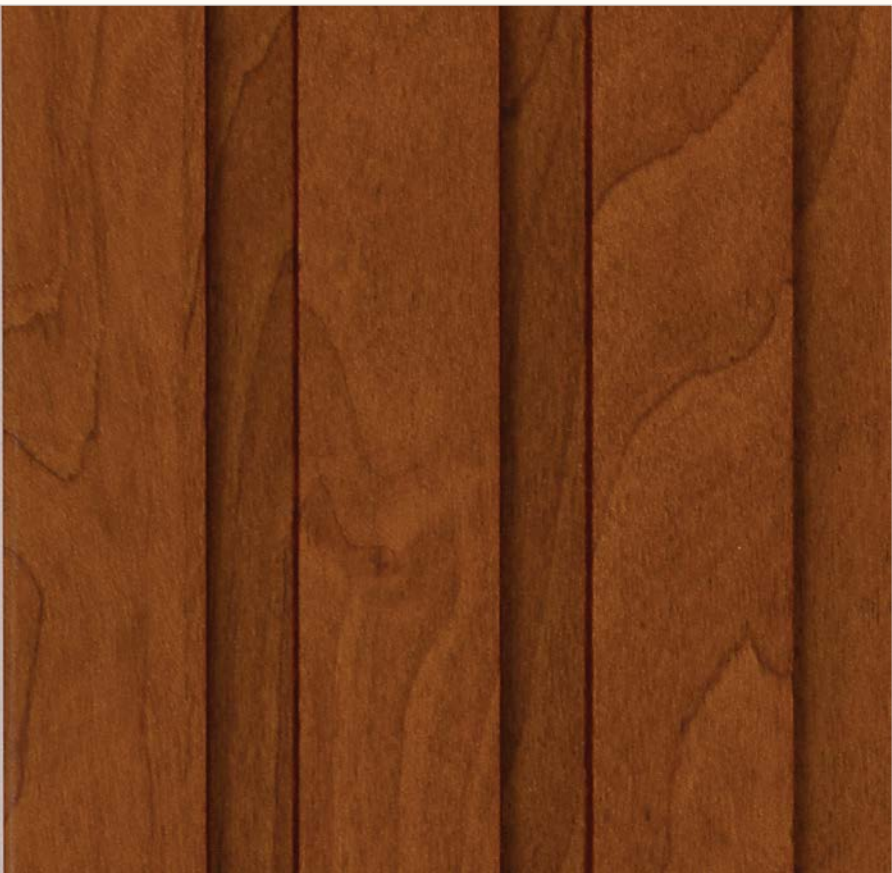

TR 6513

SAPELE CROWN



TR 6563

SAPELE CROWN



TR 6514

DYED CROTCH



TR 6564

DYED CROTCH



FEATURES



Direct-to-wall Application



Fire Retardant



Natural wooden textures



Seamless Patterns



100% Termite & borer free



100% Waterproof

Size : 9 .5 Feet (2900mm) | Width : 120mm | Thickness : 12mm(+/- 5 %)

